HYDROCYCLON & GRAVEL FILTERS

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-710

Inlet/Outlet – 0.75” Thread
Recommended flow rate – 2.5-5m³/hr
Sedimentation tank – 2.5 liter

SAP#: 72000-008895
Description: YAMIT HYDROCYCLONE 3/4 THR. W/TANK 1.5L

SAP#: 72000-008896
Description: YAMIT HYD.CYCL.3/4THR.PN16 W/TANK 1.5L

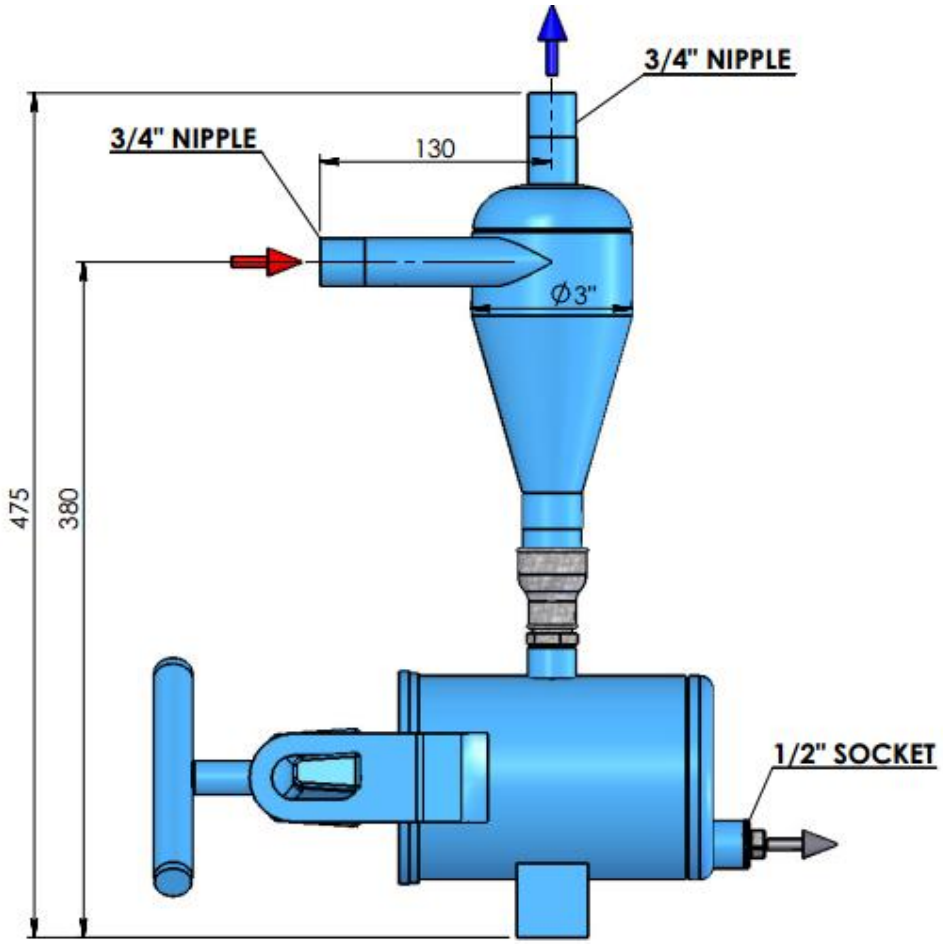


NETAFIM™
GROW MORE WITH LESS

HYDROCYCLON

F-720

Inlet/Outlet – 1” Thread
Recommended flow rate – 3.5-7.5m³/hr
Sedimentation tank – 2.5 liter

SAP#: 72000-008900
Description: YAMIT HYDROCYCLON F720 1"+ 1.5L TANK

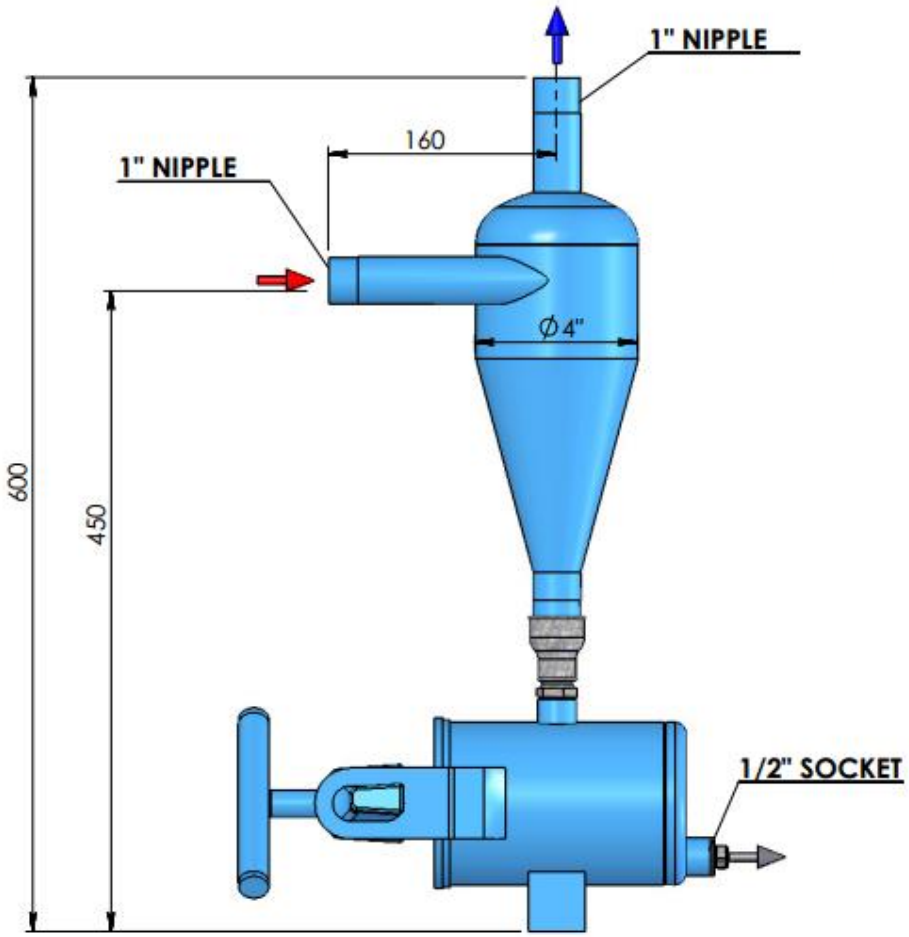

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-730

Inlet/Outlet – 1.5” Thread
Recommended flow rate – 9.5-12m³/hr
Sedimentation tank – 2.5 / 5 Liter

SAP#: 72000-008950
Description: YAMIT HYDROCYCLON 1.5" F730+2.5L TANK

SAP#: 72000-009000
Description: YAMIT HYDROCYCLONE F730 1.5"+5L TANK

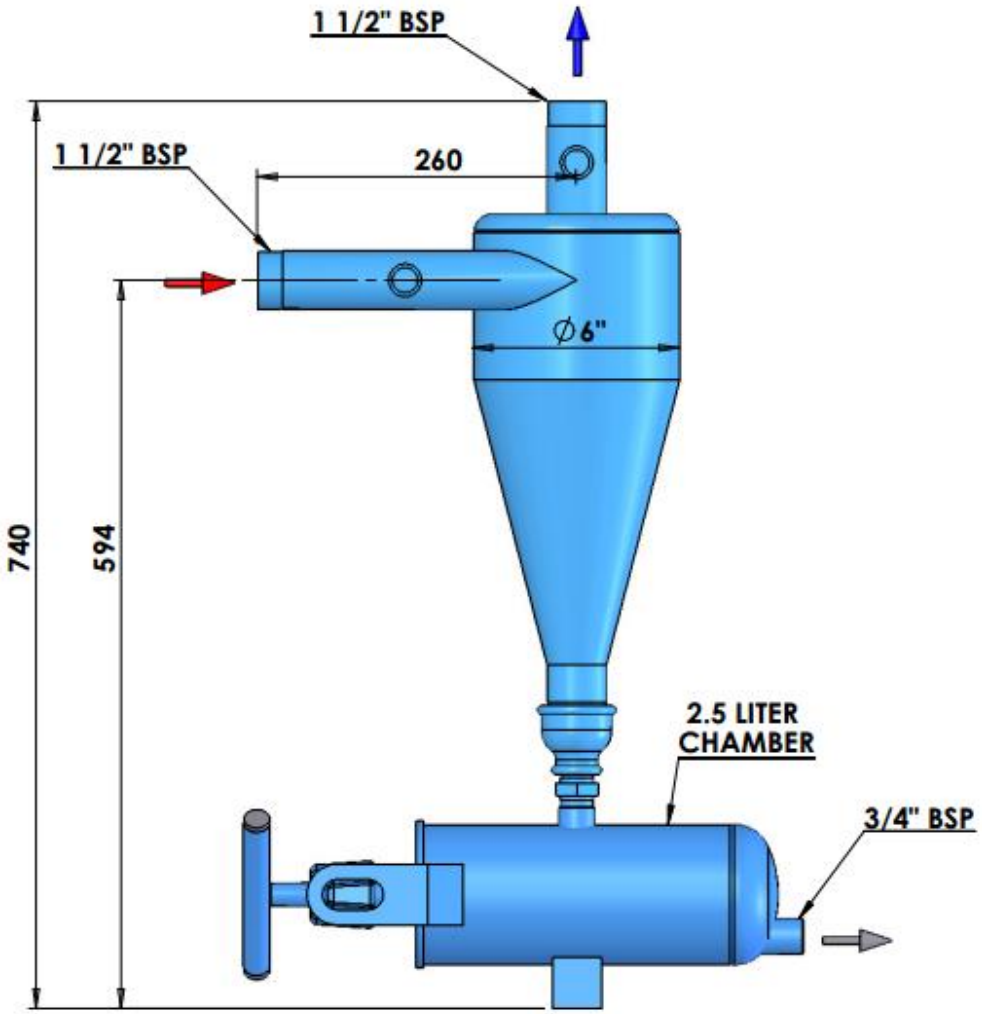


NETAFIM™
GROW MORE WITH LESS

HYDROCYCLON

F-740F

Inlet/Outlet – 2” Flange
Recommended flow rate – 14-18m³/hr
Sedimentation tank – 5 Liter

SAP#: 72000-009050
Description: YAMIT HYDROCYCLONE F740 2"+5L TANK

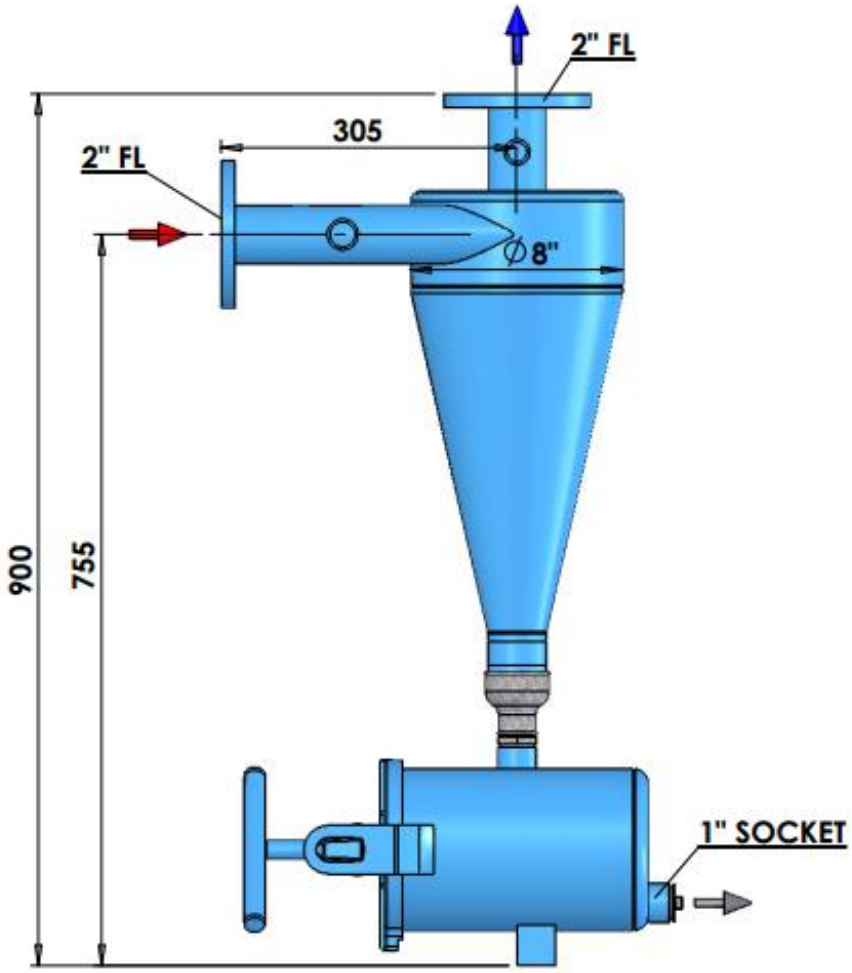

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-750F

Inlet/Outlet – 3” Flange / 3” Thread
Recommended flow rate – 35-45m³/hr
Sedimentation tank – 5 Liter

SAP#: 72000-009060
Description: YAMIT HYDROCYCLONE 3"FLANGED W/TANK 5L

SAP#: 72000-009055
Description: YAMIT HYDROCYCLONE 3"THREAD W/TANK 5L

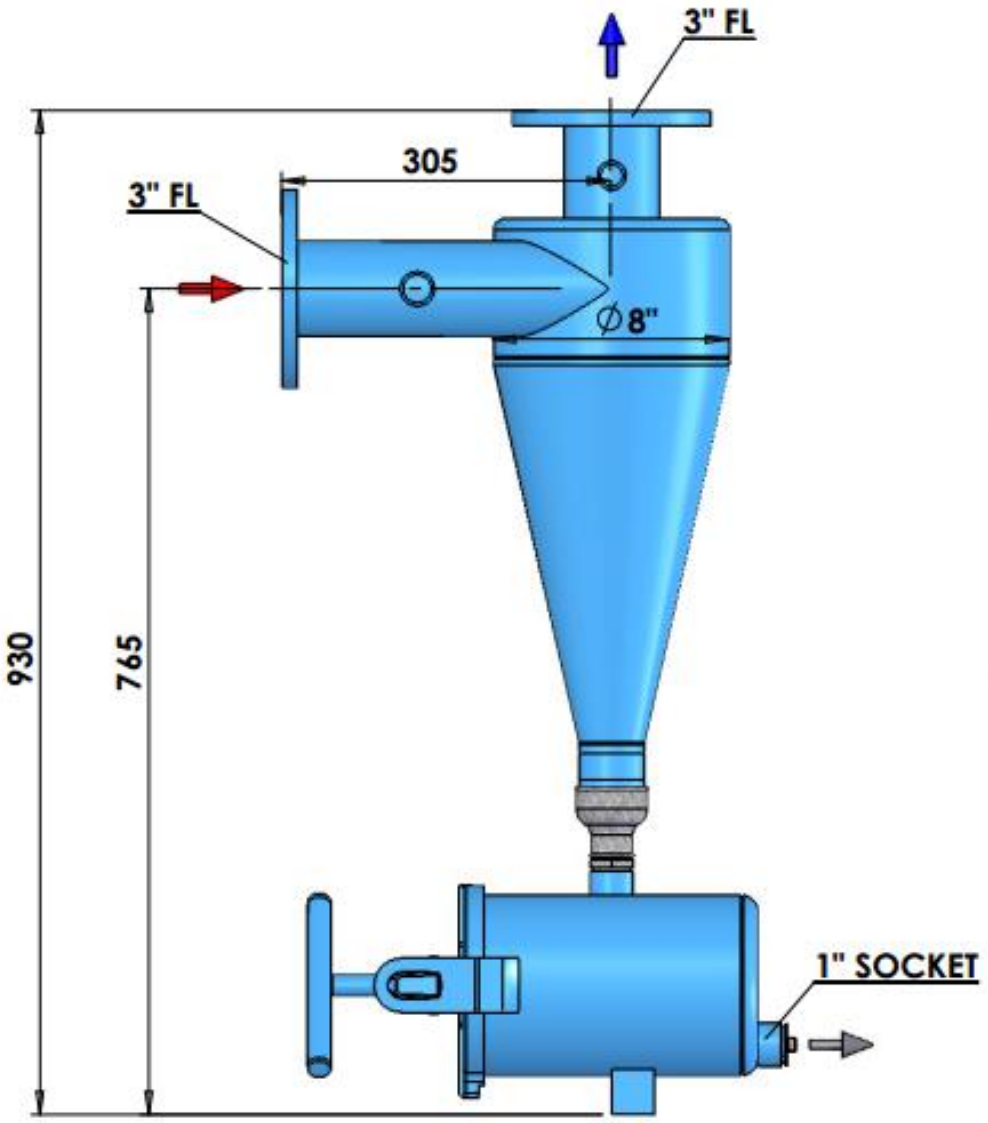

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-755F

Inlet/Outlet – 3” Flange / 4” Flange
Recommended flow rate – 50-62m³/hr
Sedimentation tank – 30 / 60 Liter

SAP#: 72000-009065
Description: YAMIT HYDROCYCLONE 4*3 FL.W/TANK 30L

SAP#: 72000-009066
Description: YAMIT HYDROCYCLONE 3"*4" FL W/TANK 60L

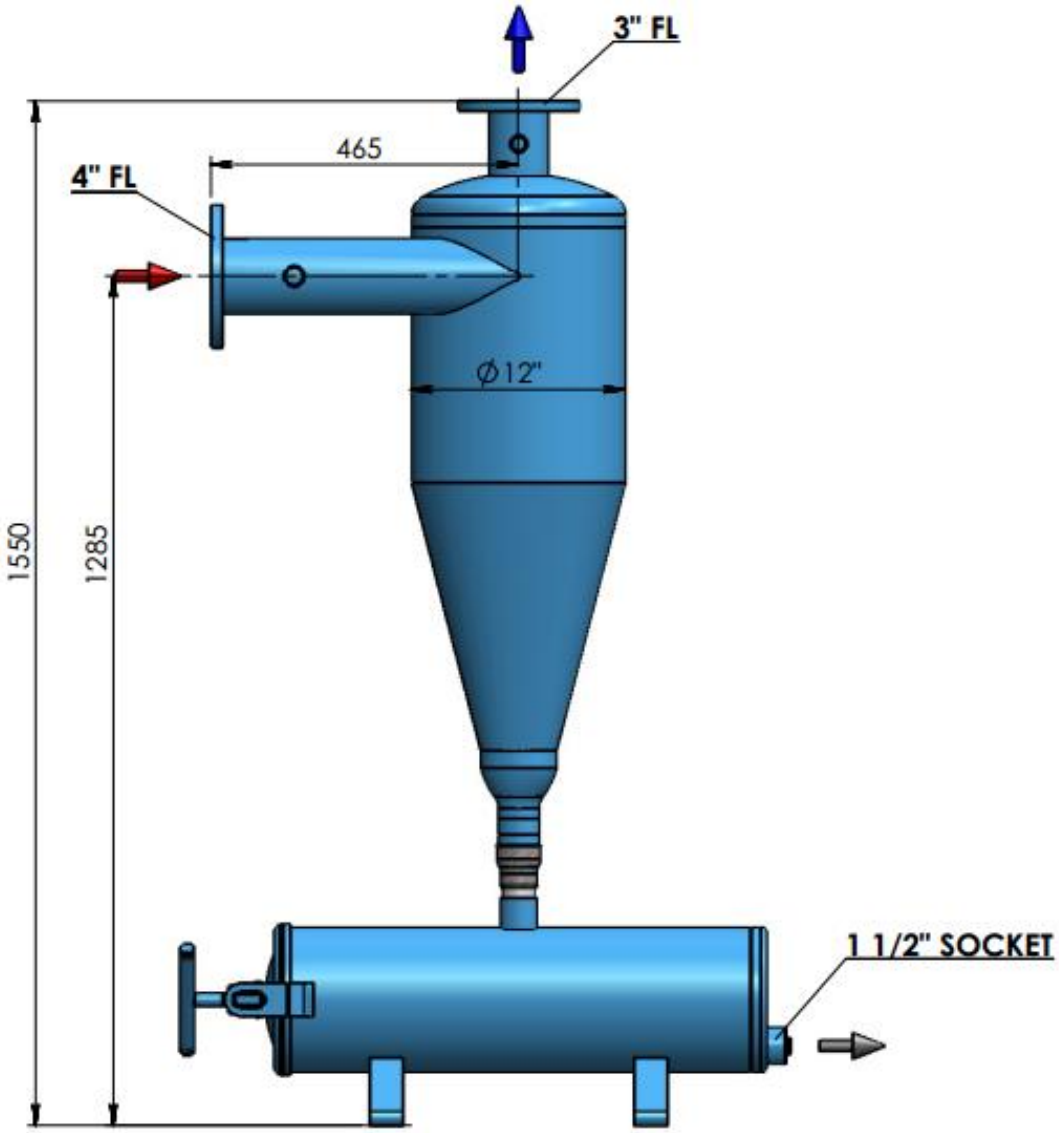

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-760

Inlet/Outlet – 4” Flange
Recommended flow rate – 86-120m³/hr
Sedimentation tank – 60 / 120 Liter

SAP#: 72000-009070
Description: YAMIT HYDROCYCLONE 4"FLANGED W/TANK 60L

SAP#: 72000-009073
Description: YAMIT HYDROCYCLONE 4FLANGED W/TANK 120L

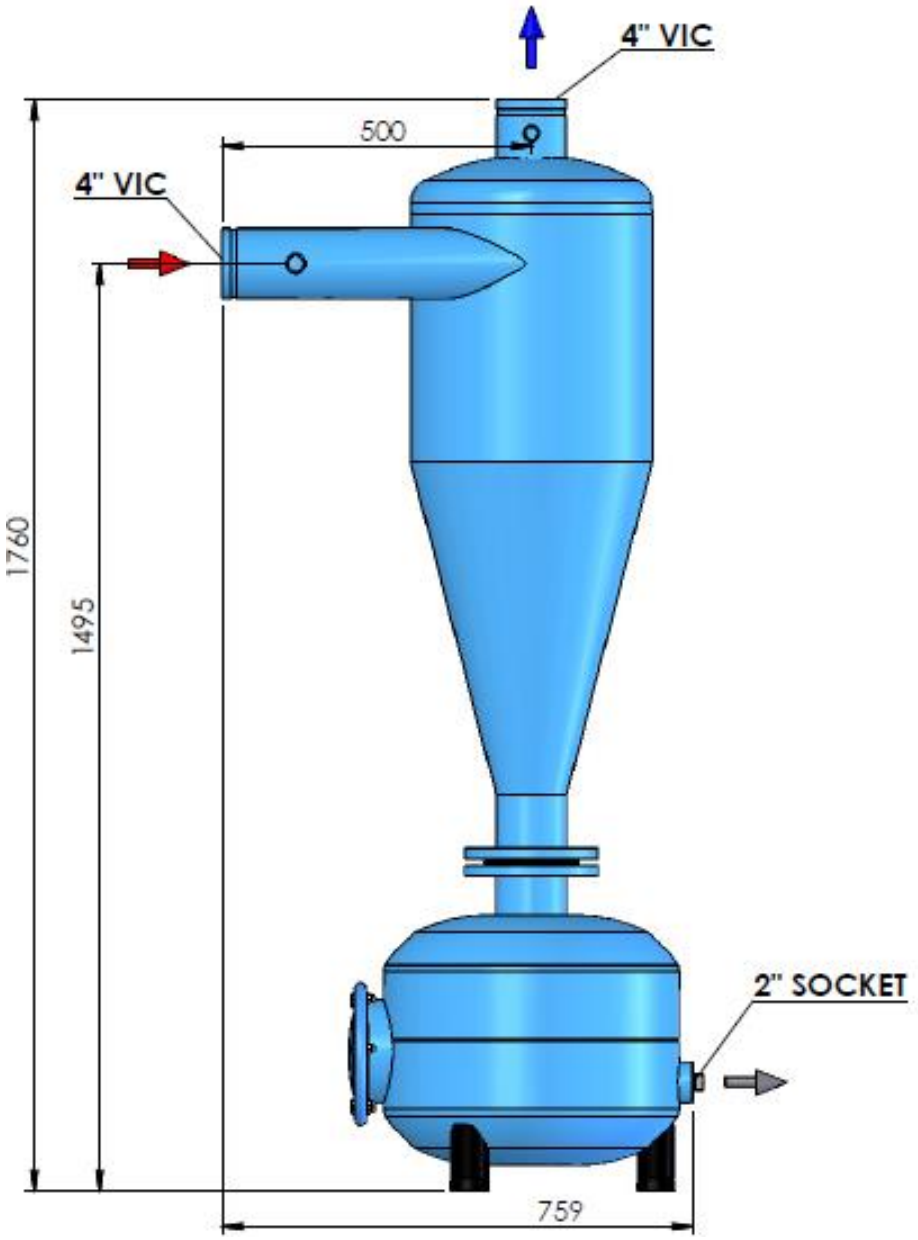

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-770F

Inlet/Outlet – 6” Flange
Recommended flow rate – 150-190m³/hr
Sedimentation tank – 90 / 150 Liter

SAP#: 72000-009075
Description: YAMIT HYDROCYCLONE 6"FLANGED W/TANK 90L

SAP#: 72000-009080
Description: YAMIT HYDROCYCLONE 6"FLANGED W/TANK 150L

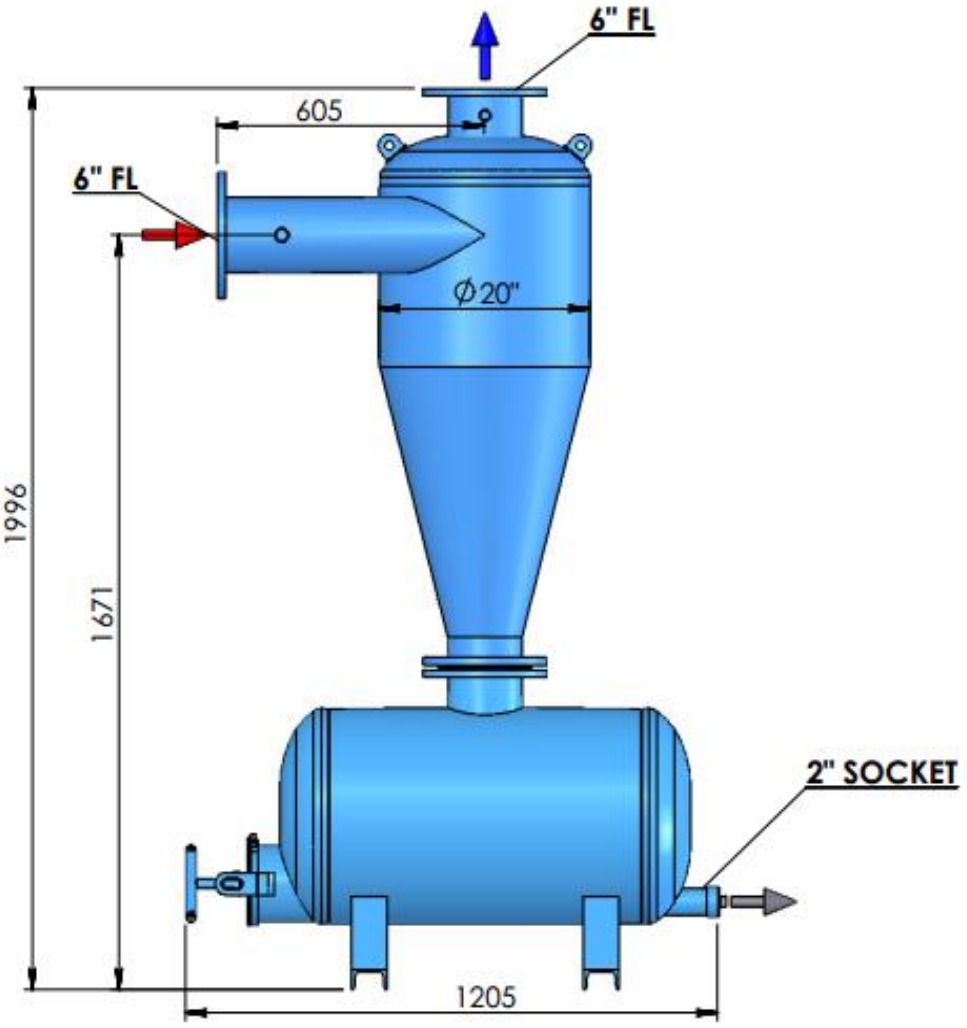

NETAFIM™
GROW MORE WITH LESS


HYDROCYCLON

F-775

Inlet/Outlet – 6” Flange / 6” Victaulic
Recommended flow rate – 180-220m³/hr
Sedimentation tank – 220 Liter

SAP#: 72000-009083
Description: YAMIT HYDROCYCLONE 6"FLANGED W/TANK 220L

SAP#: 72000-091350
Description: YAMIT HYDROCYCLONE 6" VIC W/TANK 220L

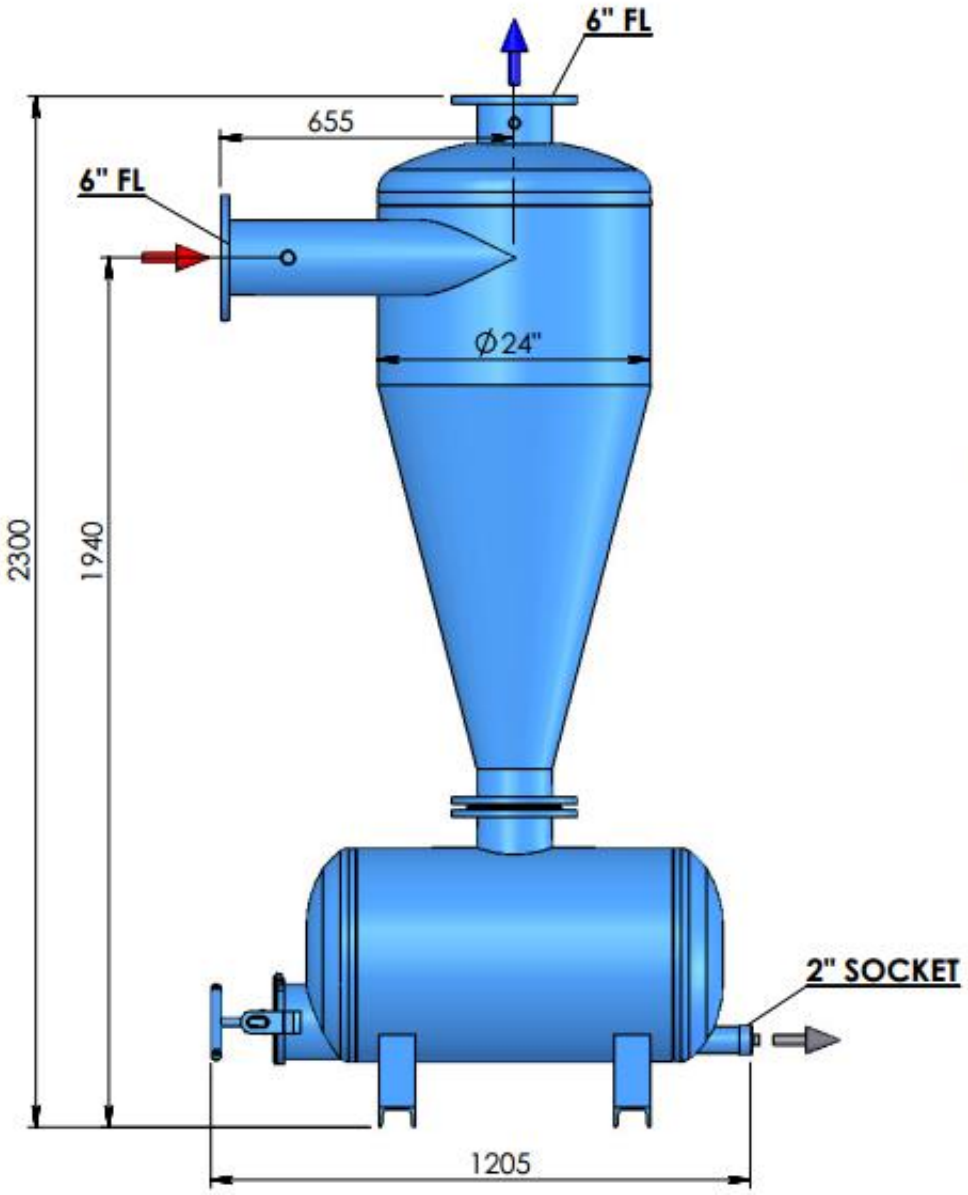


NETAFIM™
GROW MORE WITH LESS

HYDROCYCLON

F-780F

Inlet/Outlet – 8” Flange
Recommended flow rate – 230-370m³/hr
Sedimentation tank – 300 Liter

SAP#: 72000-009084
Description: YAMIT HYDROCYCLONE 8"FLANGED W/TANK 300L

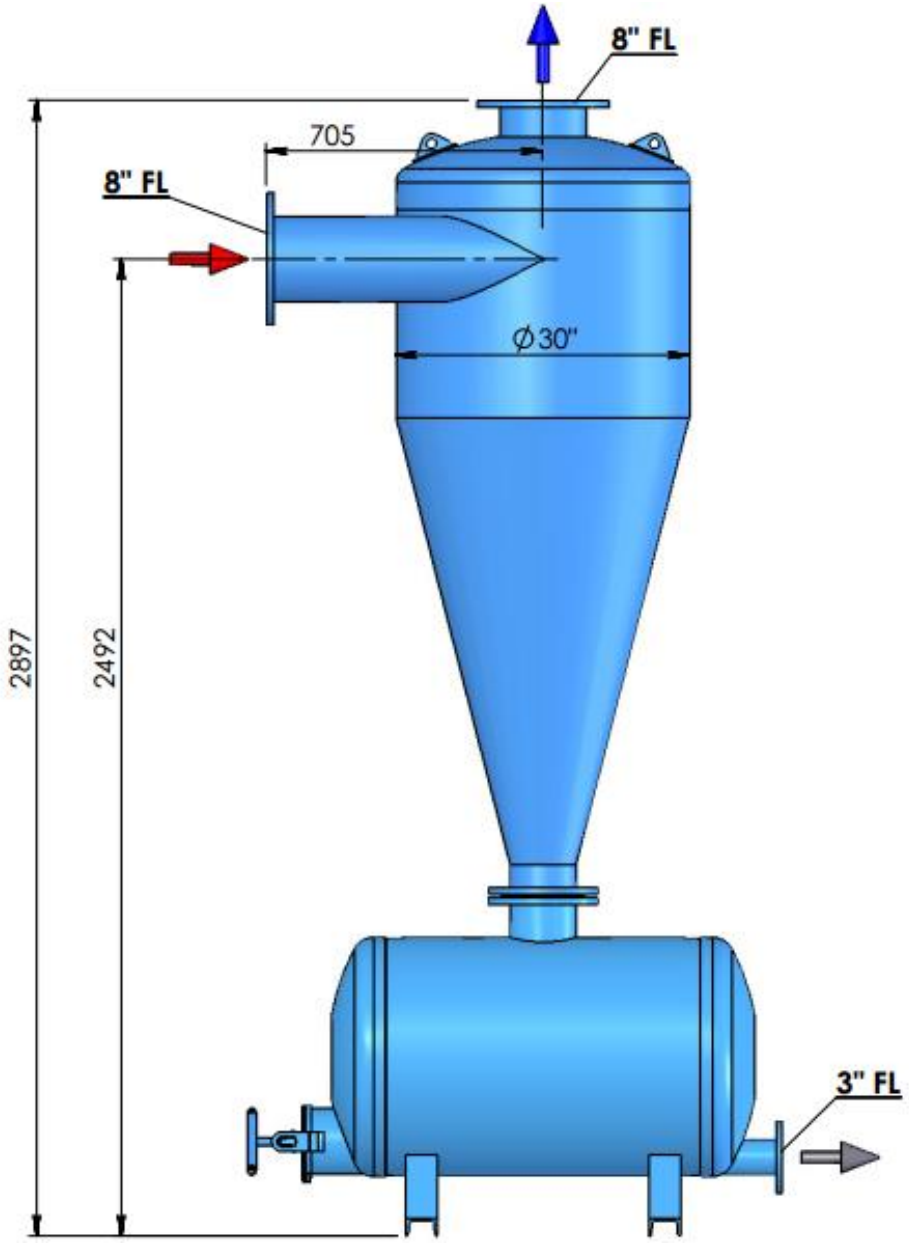


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-605M

Inlet/Outlet – 1” threaded
Media volume – 28 liter
Filtration Area – 700cm²
Recommended flow rate – 3.5-6m³/hr
Recommended backwash flow rate - 7m³/hr

SAP#: 72000-002790
Description: YAMIT GRAVEL FILTER 12 (1THR. OULET)

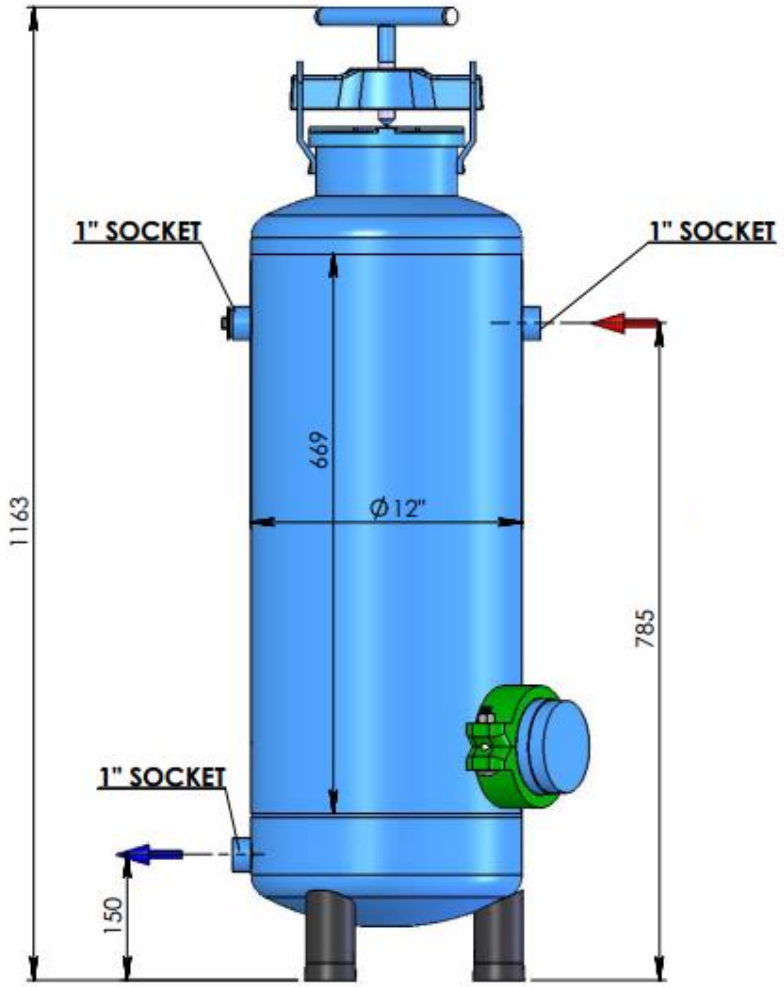


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-610M

Inlet/Outlet – 1.5” threaded
Media volume – 48 liter
Filtration Area – 1600cm²
Recommended flow rate – 5.3-9m³/hr
Recommended backwash flow rate - 10m³/hr

SAP#: 72000-002800
Description: YAMIT GRAVEL FILTER 16 (1.5THR. OULET)

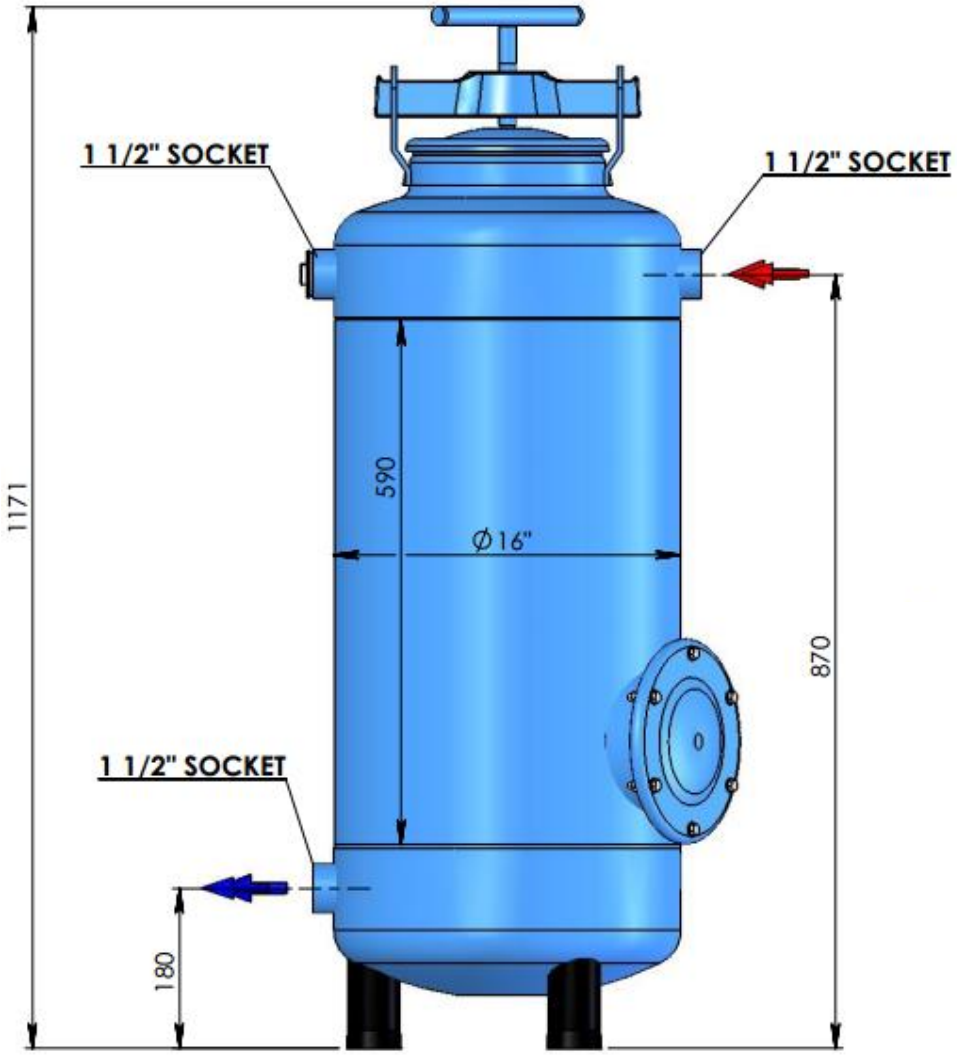


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-620M

Inlet/Outlet – 2” threaded
Media volume – 80 liter
Filtration Area – 2000cm²
Recommended flow rate – 8-13.5m³/hr
Recommended backwash flow rate - 15m³/hr

SAP#: 72000-002900
Description: YAMIT GRAVEL FILTER 20 (2THR. OULET)

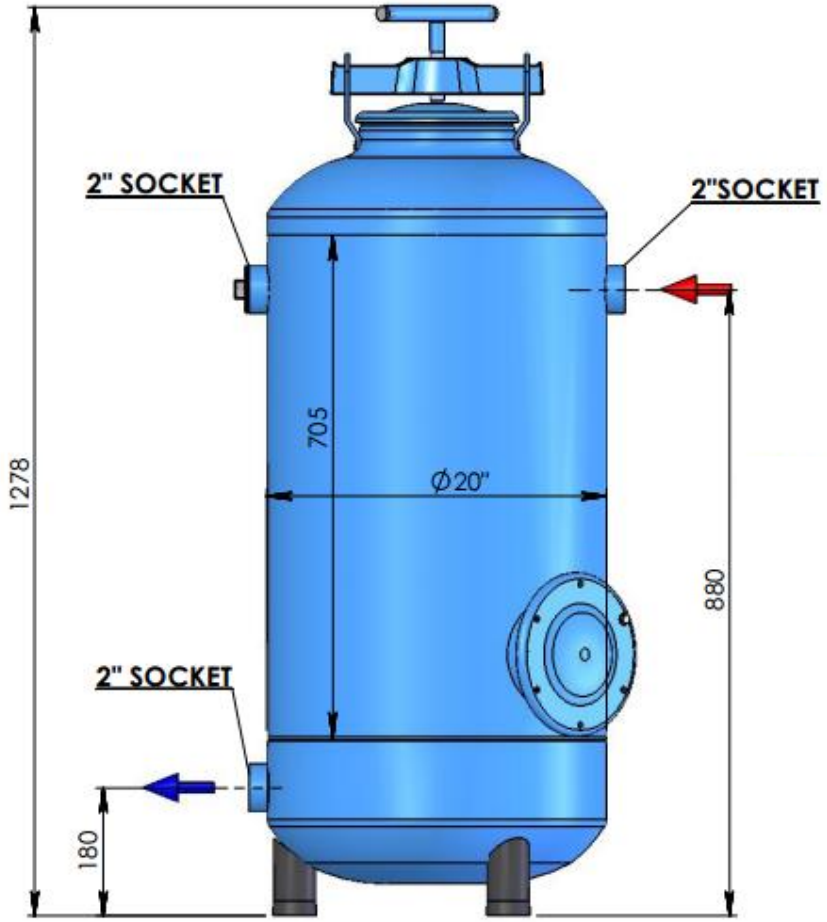


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-630M

Inlet/Outlet – 3” threaded
Media volume – 80 liter
Filtration Area – 2000cm²
Recommended flow rate – 8-13.5m³/hr
Recommended backwash flow rate - 15m³/hr

SAP#: 72000-003000
Description: YAMIT GRAVEL FILTER 20 (3THR. OULET)

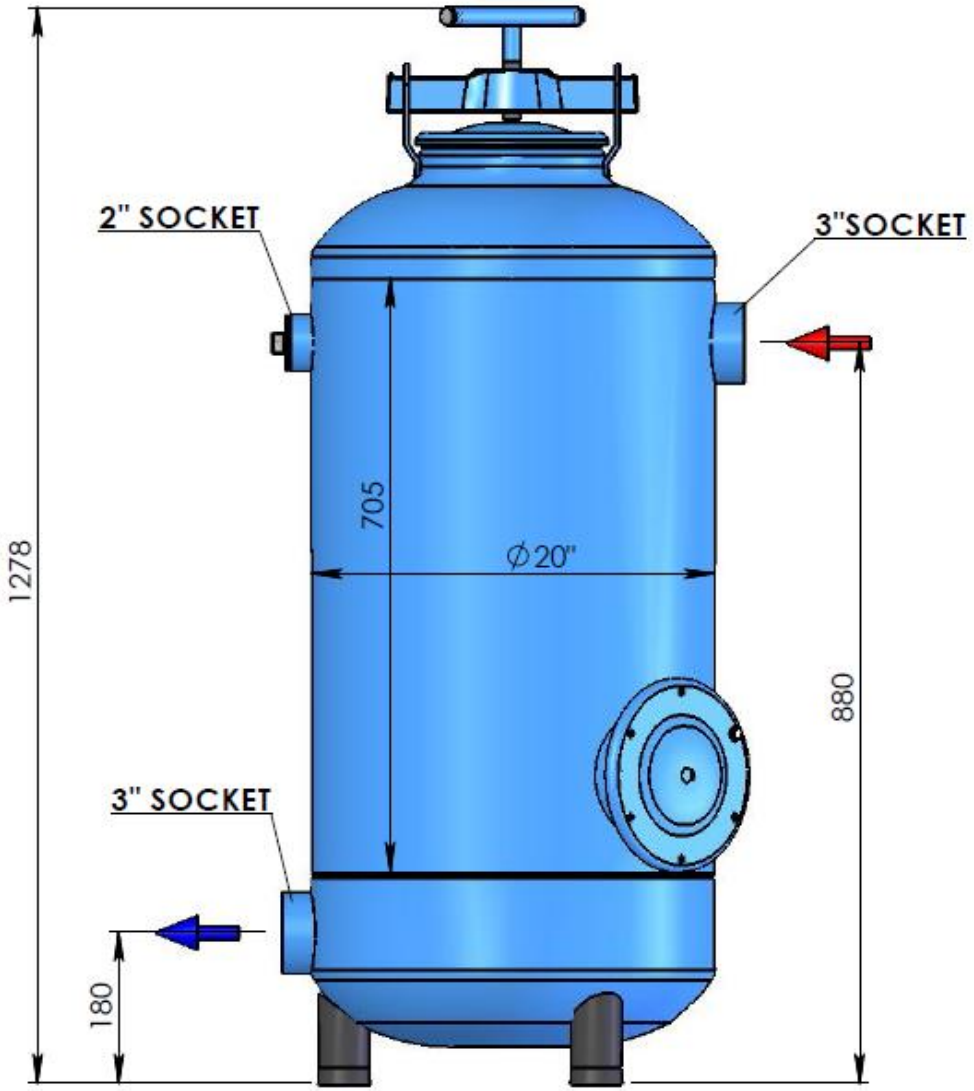


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-635M

Inlet/Outlet – 2” threaded
Media volume – 120 liter
Filtration Area – 3200cm²
Recommended flow rate – 13.5-22m³/hr
Recommended backwash flow rate - 25m³/hr

SAP#: 72000-003100
Description: YAMIT GRAVEL FILTER 24 (2THR. OULET)

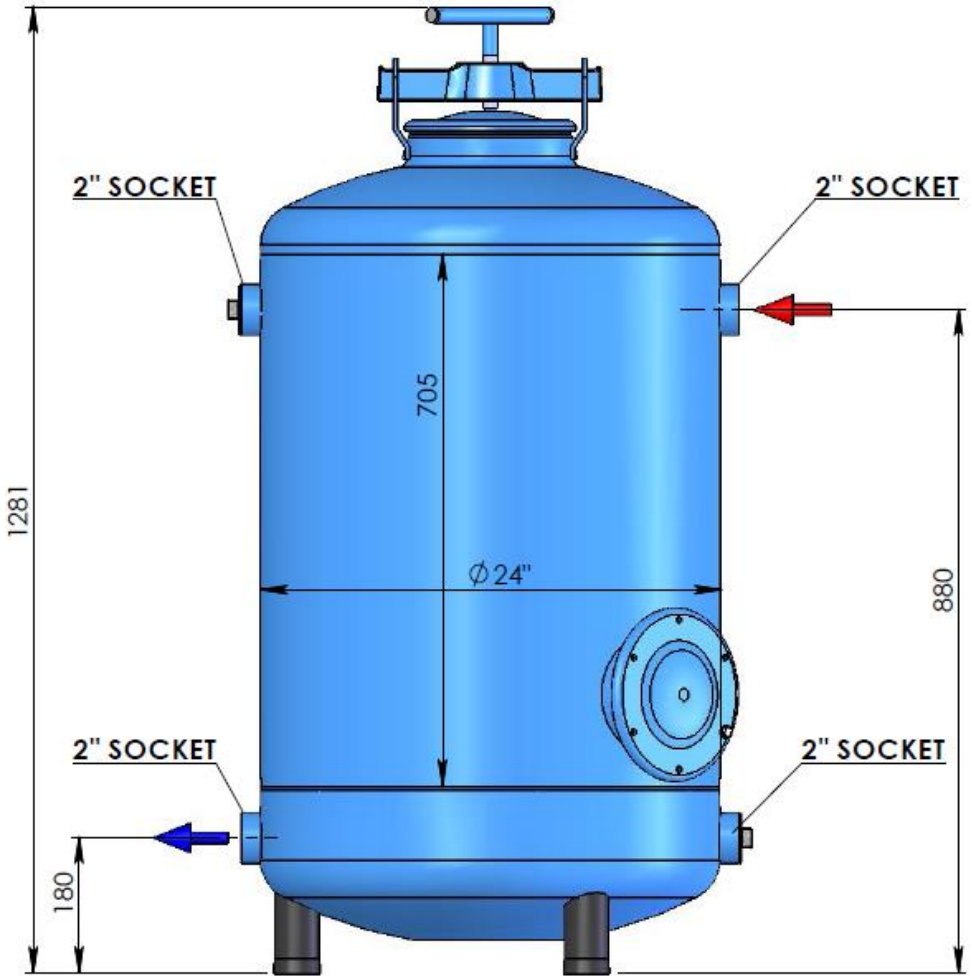


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-640F

Inlet/Outlet – 3” Flange
Media volume – 176 liter
Filtration Area – 4600cm²
Recommended flow rate – 20-33m³/hr
Recommended backwash flow rate - 37m³/hr

SAP#: 72000-003200
Description: YAMIT GRAVEL FILTER 30 (3FLANGE OULET)

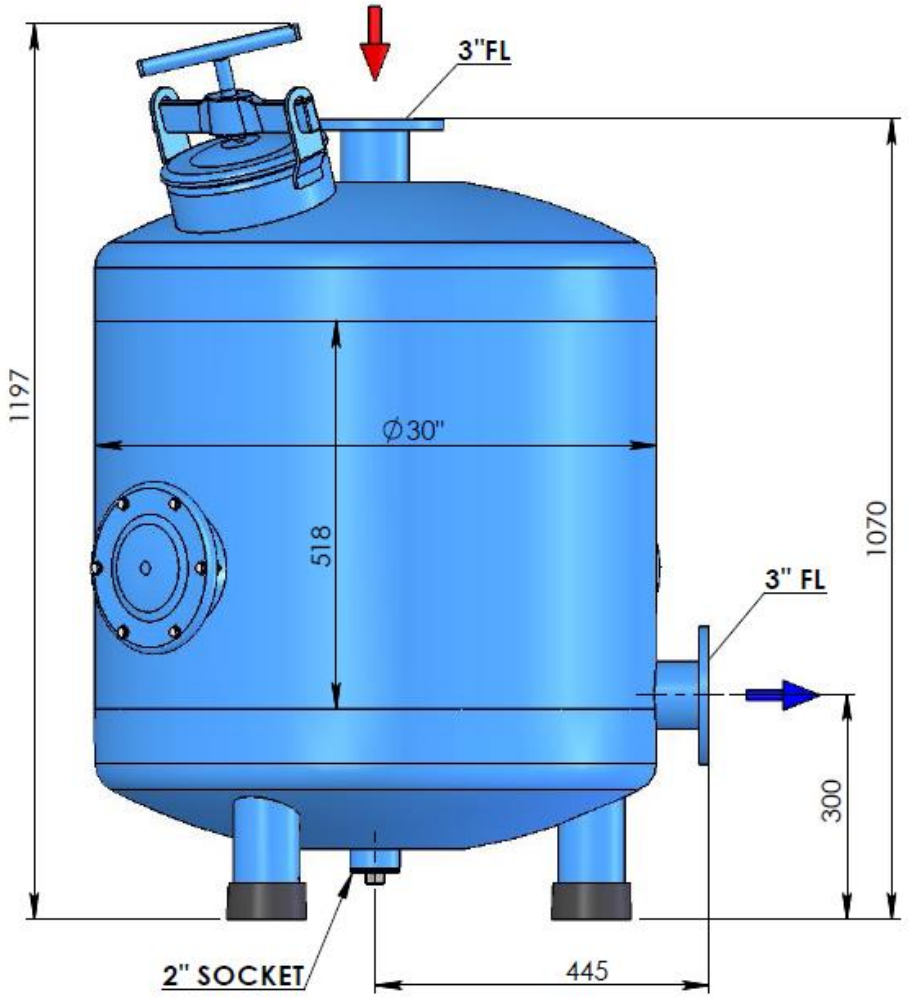


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-650F

Inlet/Outlet – 3” Flange
Media volume – 252 liter
Filtration Area – 6600cm²
Recommended flow rate – 28-50m³/hr
Recommended backwash flow rate - 53m³/h

SAP#: 72000-003300
Description: YAMIT GRAVEL FILTER 36 (3FLANGE OULET)

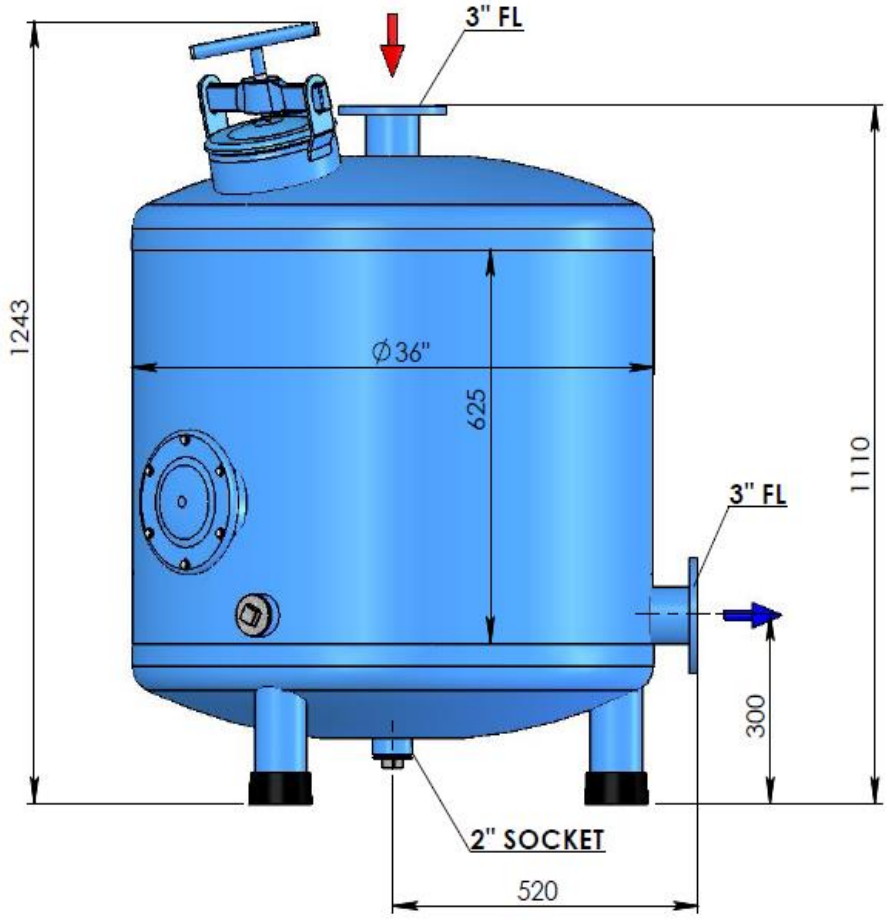


NETAFIM™
GROW MORE WITH LESS

GRAVEL FILTERS

F-660F

Inlet/Outlet – 4” Flange
Media volume – 452 liter
Filtration Area – 11300cm²
Recommended flow rate – 50-85m³/hr
Recommended backwash flow rate - 96m³/h

SAP#: 72000-003500
Description: AMIT GRAVEL OR SAND FILTER FL 4(48 PN8)

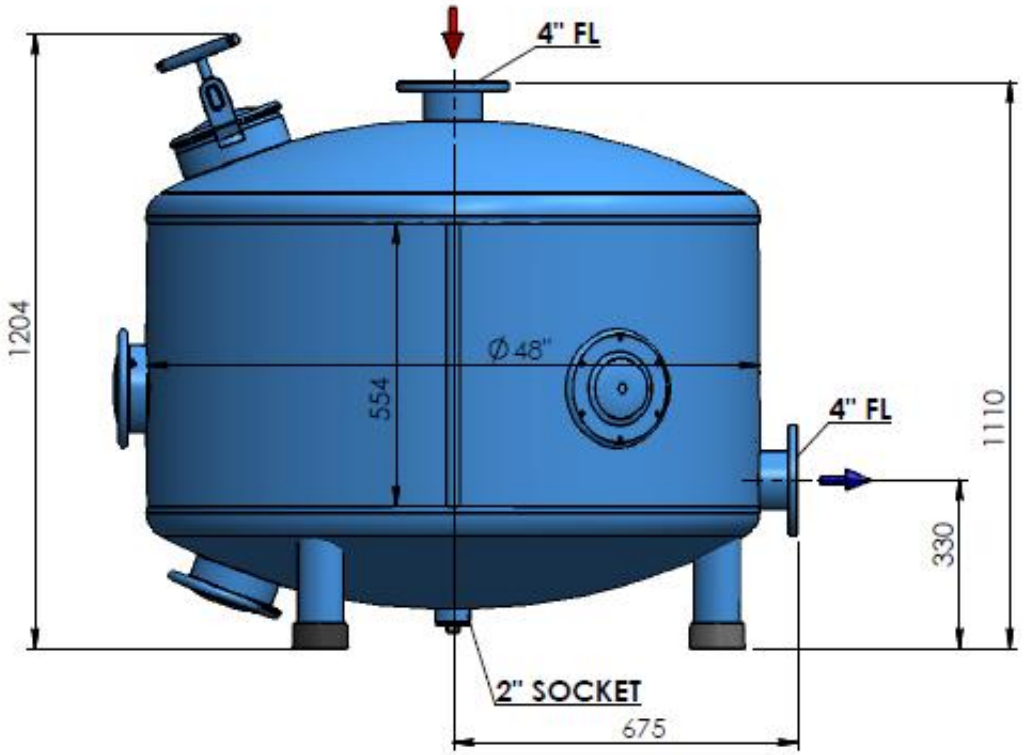

NETAFIM™
GROW MORE WITH LESS